


Fumo di Toscana

Marble

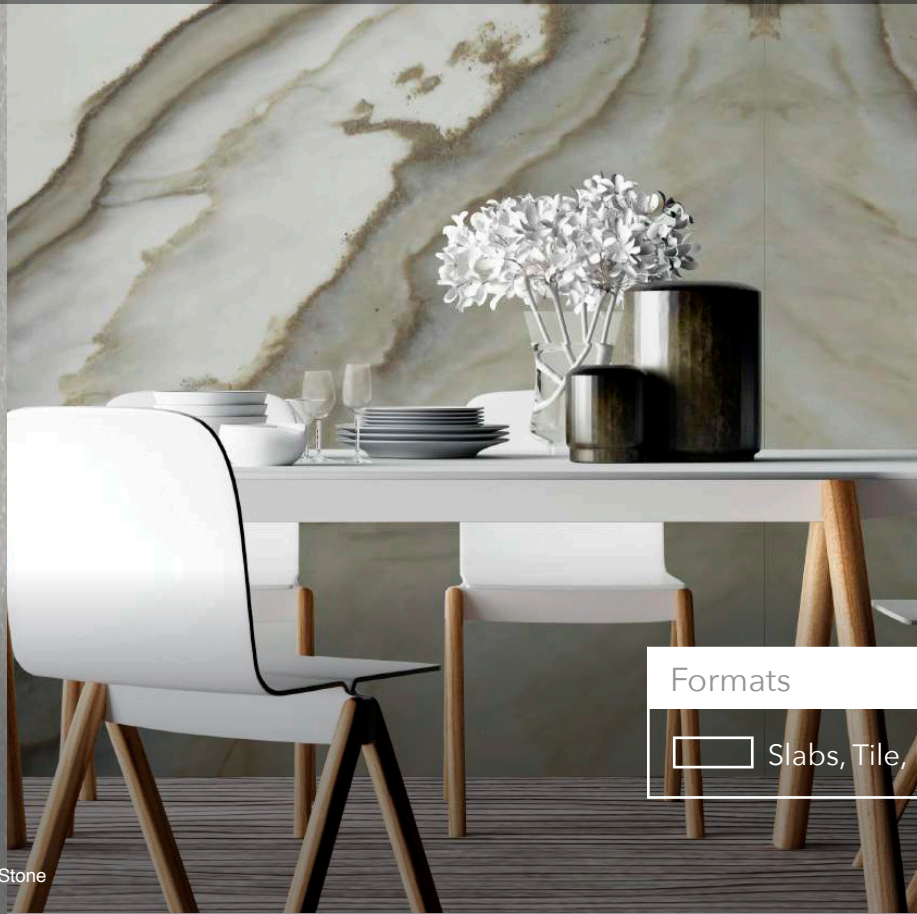

Formats

Slabs, Tile, Mosaics & Cut to Size

Featured: Fumo di Toscana - Natural Stone

Details	Test	Std.	Units	Conditioning	Avg. Value	Std. Dev.
Formats: Slabs, Tile, Mosaics & Cut to Size	Water Absorption at atmospheric pressure	EN 13755	%	-	0,13	0,01
Slab Thickness: 2cm or 3cm	Apparent Density	EN 1936	Kg/m3	-	2720	5,5
Finish: Polished	Open Porosity	EN 1936	%	-	0,5	0,24
Applications: Interiors, Vanity Tops, Countertops	Flexural Strength under concentrated load	EN 12372	MPa	Dry	20,9	1,5
	Flexural Strength under concentrated load	EN 12372	MPa	After 48 cycles of frost	16,8	1,2
	Compressive Strength	EN 1926	MPa	-	72,7	9,1
	Slip Resistance Honed grade 220	EN 14231	SRV	Dry	51	5
	Slip Resistance Honed grade 220	EN 14231	SRV	Wet	24	3

Color Options

Symbols



Natural Stone



Floor & Wall



Polished



Residential



Commercial