


# Calacatta

Marble

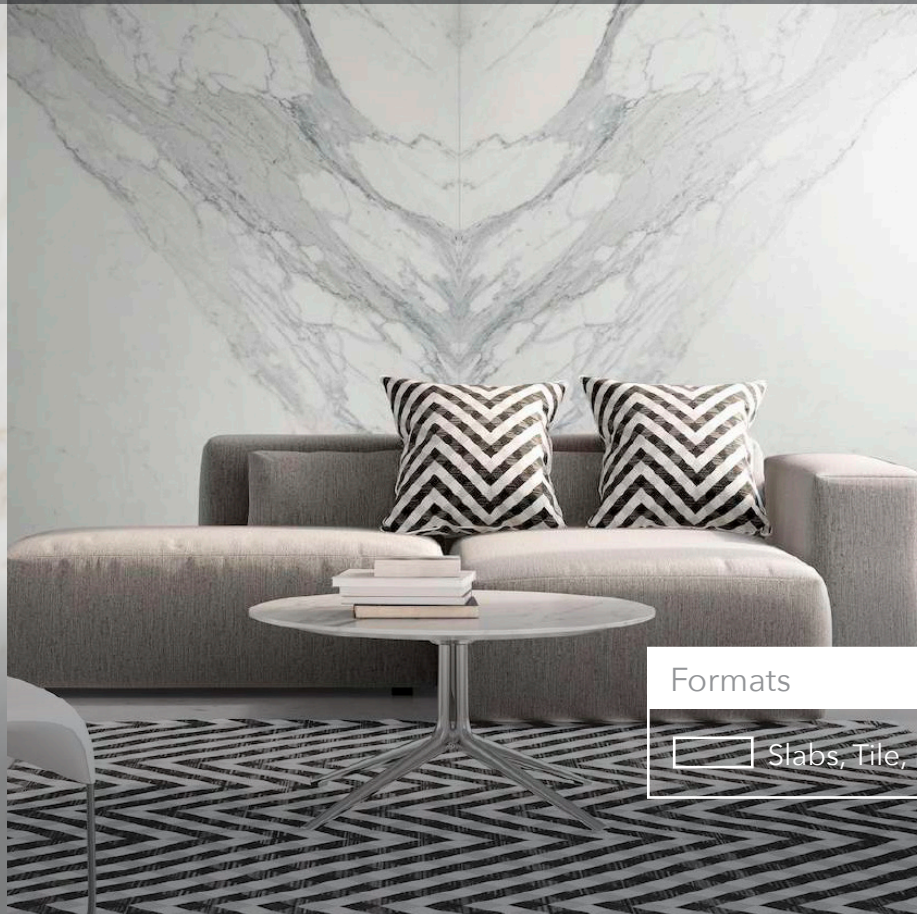

## Formats


Slabs, Tile, Mosaics & Cut to Size

Featured: Calacatta - Natural Stone

Details	Test	Std.	Units	Conditioning	Avg. Value	Std. Dev.
Formats: Slabs, Tile, Mosaics & Cut to Size	Water Absorption at atmospheric pressure	EN 13766	%	-	0,22	0,12
Thickness: 2cm or 3cm	Apparent Density	EN 1936	Kg/m3	-	2710	0,0
Finish: Polished	Open Porosity	EN 1936	%	-	0,5	0,0
Applications: Interiors, Vanity Tops, Countertops	Flexural Strength	EN 12372	MPa	Dry	4,9	0,6
	Flexural Strength	EN 12372	MPa	After 48 cycles of frost	4,5	0,7
	Compressive Strength	EN 1926	MPa	-	69,6	8,2
	Slip Resistance Honed grade 220	EN 14231	SRV	Dry	59	5
	Slip Resistance Honed grade 220	EN 14231	SRV	Wet	27	3

## Color Options

## Symbols

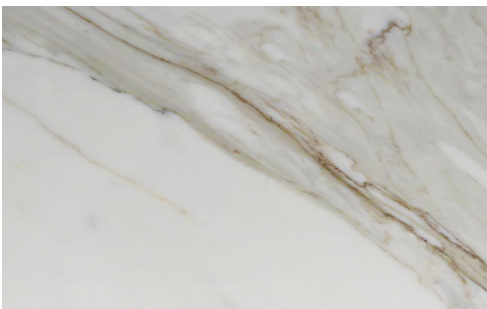

Natural Stone



Floor & Wall



Polished



Residential



Commercial