


Riverbend

Marble



Formats

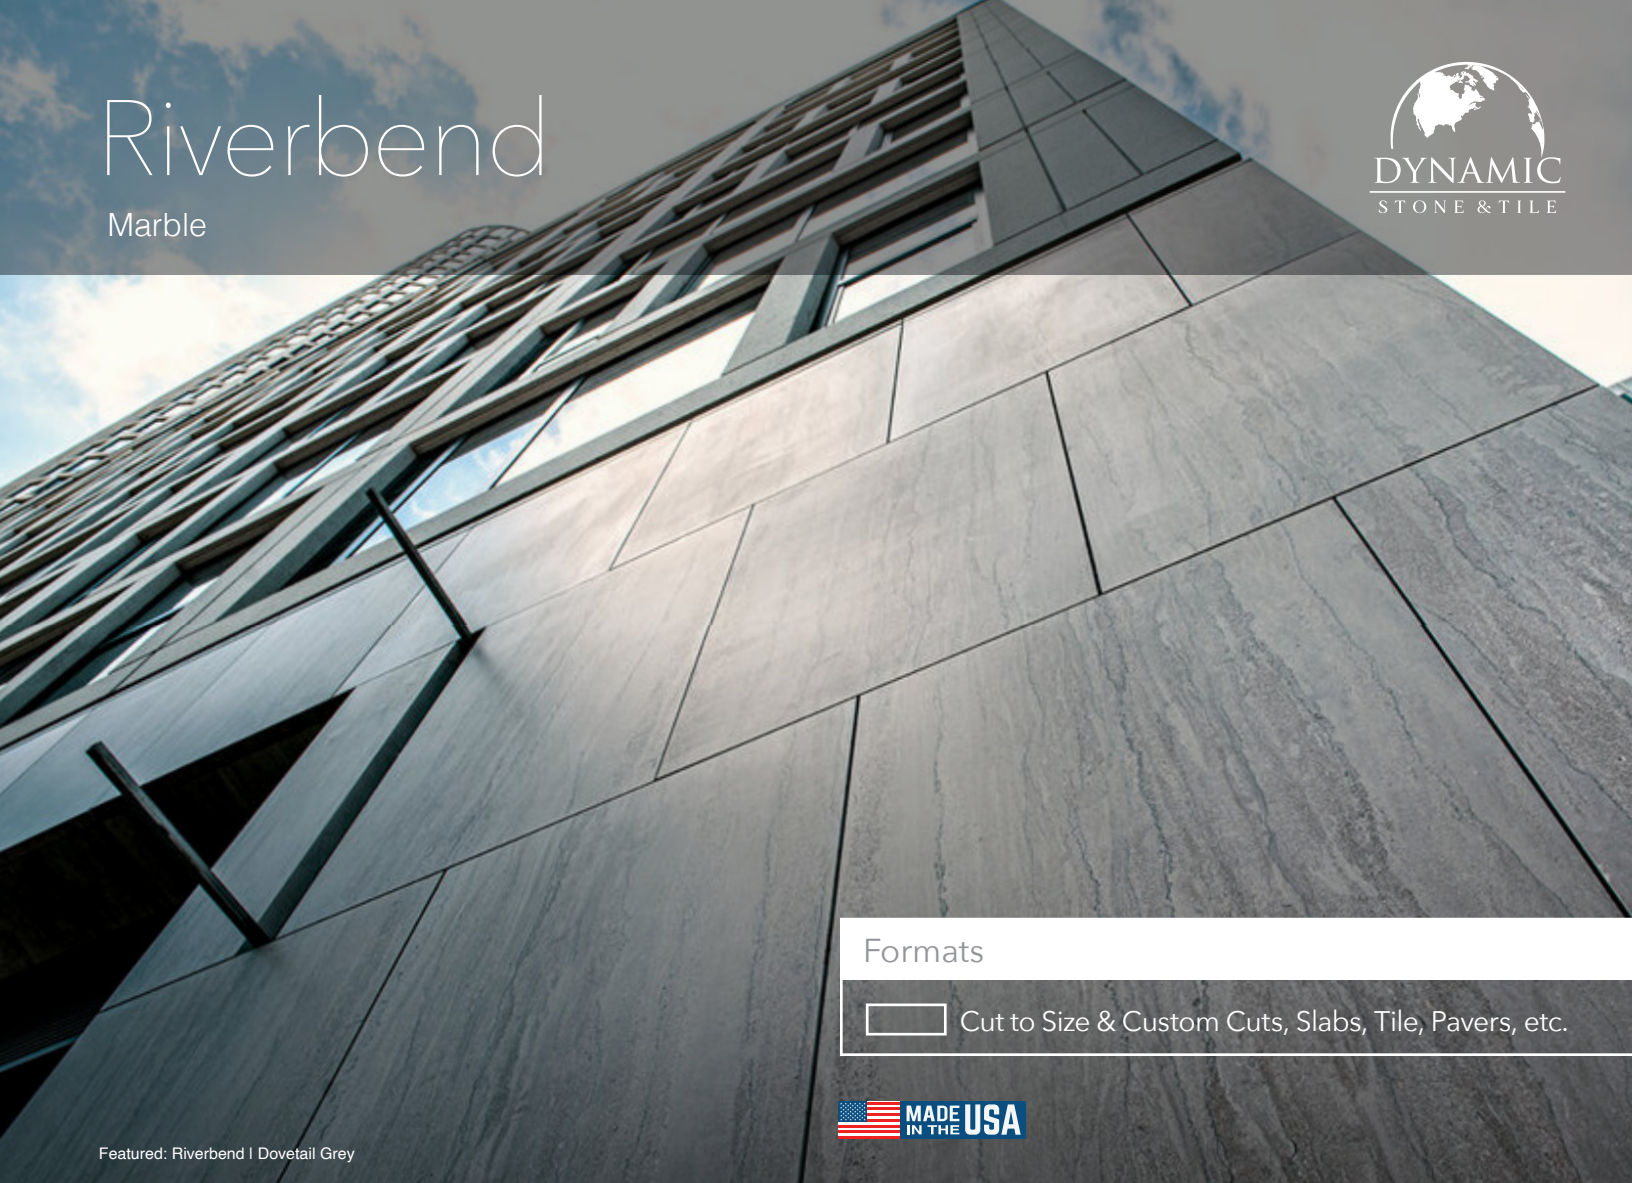

Cut to Size & Custom Cuts, Slabs, Tile, Pavers, etc.



Featured: Riverbend I Dovetail Grey

Details	Test	Method	Results
Colors: Dovetail Grey and Dorian Grey (Light or Dark)	Water Absorption	ASTM C97	0.61%
Finishes: Polished, honed, brushed, bush hammered, split face	Density	ASTM C97	2,620 kg/m ³
Formats: Cut to size and custom cuts; Slabs, tile, pavers, ledgers, stairs accessories and window sills, exterior facades and veneers.	Weight	-	163.6 pcf
Application: Exterior/interiors commercial and residential. Due to its density, our limestone III is not vulnerable to salt corrosion, therefore it is suitable for exterior coastal areas applications.	Modulus of Rupture	ASTM C99	1,785 psi (Dorian Grey), 1,299 psi (Dovetail Grey)
Available in cross cut (Dorian Grey) and Vein Cut (Dovetail Grey)	Compressive Strength	ASTM C170	10,540 psi
	Flexural Strength	ASTM C880	1,193 psi (Dorian Grey), 1,293 psi (Dovetail Grey)
	Bulk Specific Gravity	-	2.62
	Static Coefficient of Friction	ASTM F609	0.61 (Honed), 0.89 (Saw Cut)
	Dynamic Coefficient of Friction	ANSI A1137.1 ANSI A326.3	0.69 (Sandblasted) 0.41 (Honed), 0.60 (Brushed)
	Salt Crystallization	ASTM C1353 ASTM C568	Average 11.9 Ha 1.0 Std Deviation
	Resistance to Salt Crystallization	EN 12370	Class A 0.046 Mass Loss 0.052 Std Deviation

Colors



Dorian Grey



Dovetail Grey

Symbols

