


# River-Bend

Marble

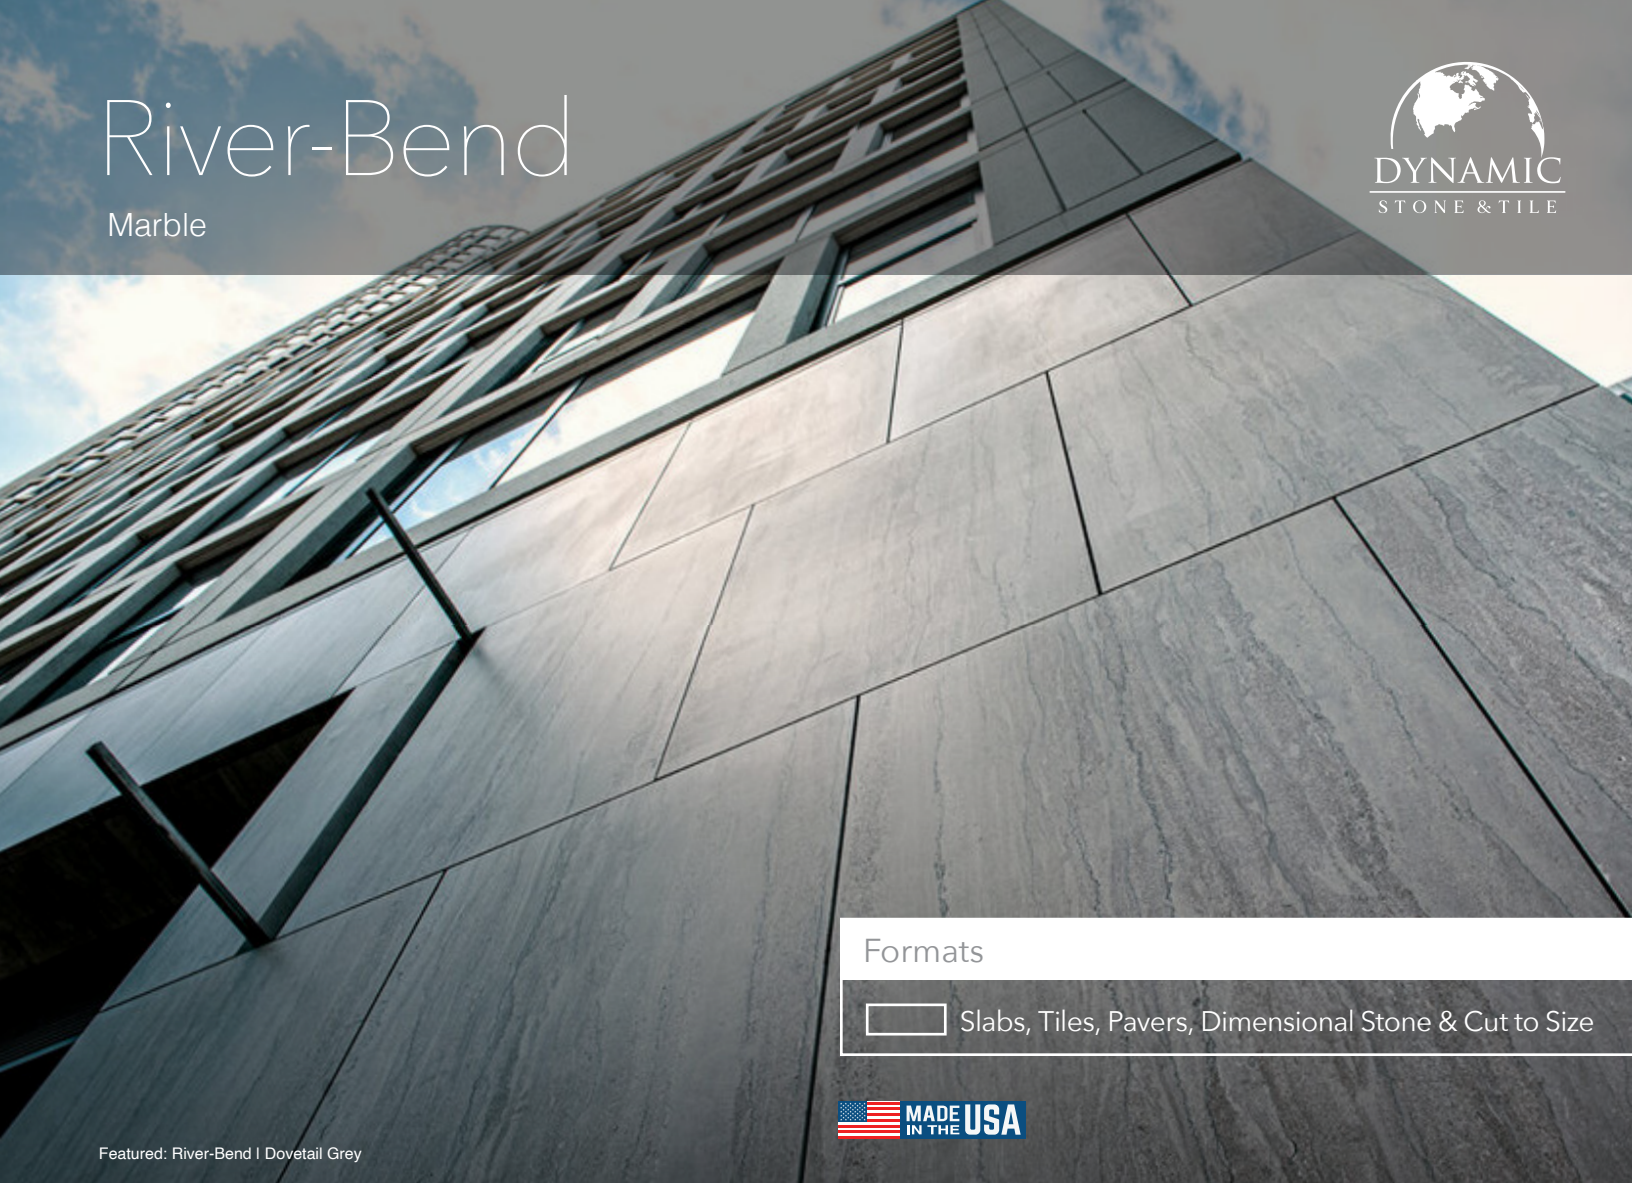

## Formats


 Slabs, Tiles, Pavers, Dimensional Stone & Cut to Size



Featured: River-Bend | Dovetail Grey

Details	Test	Method	Results
Colors: Dovetail Grey Dorian Grey (Light or Dark)	Water Absorption	ASTM C97	0.61%
	Density	ASTM C97	2,620 kg/m <sup>3</sup>
Formats: Slabs, Tiles, Pavers, Ledger Stone and Landscaping, Cut to Size including Stair Treads and Window Sills	Weight	-	163.6 pcf
	Modulus of Rupture	ASTM C99	1,785 psi (Dorian Grey), 1,299 psi (Dovetail Grey)
	Compressive Strength	ASTM C170	10,540 psi
	Flexural Strength	ASTM C880	1,193 psi (Dorian Grey), 1,293 psi (Dovetail Grey)
	Bulk Specific Gravity	-	2.62
Applications: Veneer, Countertops & Sinks, Fireplaces & Hearths, Commercial, Paving, and Dimensional	Static Coefficient of Friction	ASTM F609	0.61 (Honed), 0.89 (Saw Cut)
	Dynamic Coefficient of Friction	ANSI A1137.1	0.69 (Sandblasted)
		ANSI A326.3	0.41 (Honed), 0.60 (Brushed)
	Salt Crystallization	ASTM C1353 ASTM C568	Average 11.9 Ha 1.0 Std Deviation
Resistance to Salt Crystallization	EN 12370	Class A 0.046 Mass Loss 0.052 Std Deviation	

## Colors



Dorian Grey



Dovetail Grey

## Symbols

