

Hermes

Granite Slab

CELESTIAL
COLLECTION



Featured: Hermes | Lineal Plus

Details

Slab Size: 114" x 70"
Thickness: 2cm

Available in: Slabs & Cut to Size
Contact your sales representative
for minimum order quantities.

Applications

Interior & Exterior Wall Cladding
Kitchen | Bath | Wet Areas



| Test | Std. | Unit | Ave. Value | Condition |
|--|-----------|-----------------------|------------|-----------------|
| Dry Density | EN 1936 | (gr/cm ³) | 2.60 | - |
| Saturated Density | EN 1936 | (gr/cm ³) | 2.62 | - |
| Porosity | EN 1936 | (%) | 1.28 | - |
| Specific Gravity | EN 1936 | (Kg/m ³) | 2.64 | - |
| Water Absorption Under Atmospheric Pressure | EN 13755 | (%) | 0.49 | - |
| Capillary Water Absorption | EN 1925 | (Kg/m ²) | 0.54 | - |
| Compressive Strength | EN 1926 | (MPa) | 86.16 | Dry |
| Tensile Strength | ISRM 1981 | (MPa) | 8.54 | Dry |
| Flexural Strength | EN 12372 | (MPa) | 12.51 | Dry |
| Resistance to Salt Crystallization | EN 12370 | (Mass loss %) | -0.26 | After 48 Cycles |
| Resistance to Freeze-Thaw | EN12371 | (Mass loss %) | -0.04 | After 48 Cycles |
| Resistance to Acid (H ₂ SO ₄) | EN 13919 | (Mass loss %) | -0.07 | After 48 Cycles |
| Thermal Shock | EN 14066 | (Mass loss %) | -0.21 | After 48 Cycles |


Available Designs



Hermes | Lineal Extreme Light



Hermes | Lineal Plus

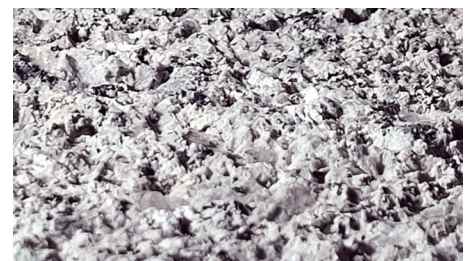

Hermes | Super Rock